
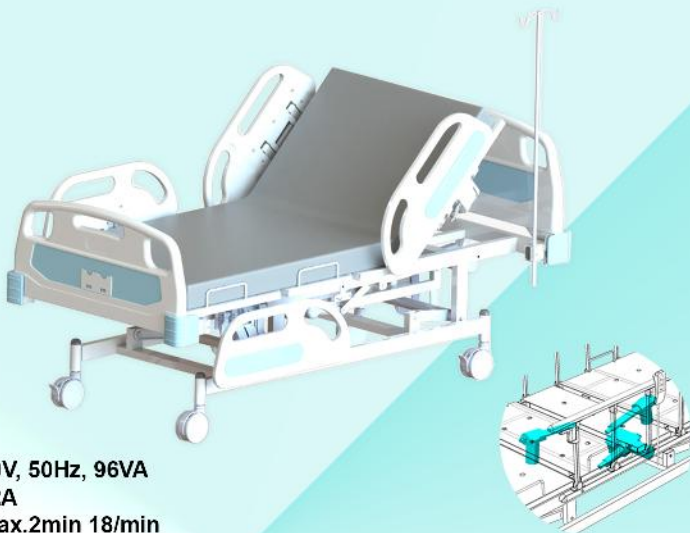



3 Actuator Hospital Bed Electric Side Blow

CIPTAKES



Input : 220-240V, 50Hz, 96VA
Output : 28V, 1.2A
Duty cycle : 10%, max.2min 18/min

Specification :

* Part

1. Actuator Mechanism

Actuator can be adjust by control that are easily reachable by patient.

2. Head & foot panel

Head & foot board made of HDPE, detachable & easy to clean. Equipped with bumper (with humanization design for anti collision effect), located at each corner

3. Wheels

Four wheels 5" double wheel, equipped with brakes on two of them

4. Side Blow

Made of HDPE, with collapsible system and can be foled

5. Infuse stand

Made of stainless steel pipe, adjustable height with screw lock. Two hanger (hook).

6. Mattress

Dimension 1900 (L) x 860 (W) x 100 (H) mm

7. Urine Hanger

Made of metal & Powder Coating Finishing

* Position

Back raise lifting angle : 0 - 70° (Approx)
Knee raise lifting angle : 0 - 30° (Approx)
Hi-Low : 490 - 730 mm (Approx)

* Dimension (Approx)

Overall 2140 (L) x 970 (W) x 970 (H) mm

* Attention !



Maximum Load 200 Kg

* Direction

Push the triangle with upwards point to rise the back, knee and hi-low movement of bed and push the triangle downward point to lower.

* TKDN

Nilai : 46.87%
Sertifikat : 784/SJ-IND.8/TKDN/1/2023

* Scan here to visit webpage



Manufactured by :
PT. Tri Cipta Teknindo
Jl. Jababeka XIV Blok J5R
Kawasan Industri Jababeka 1
Cikarang - Bekasi