


3 Crank Hospital Bed Manual

LivWell

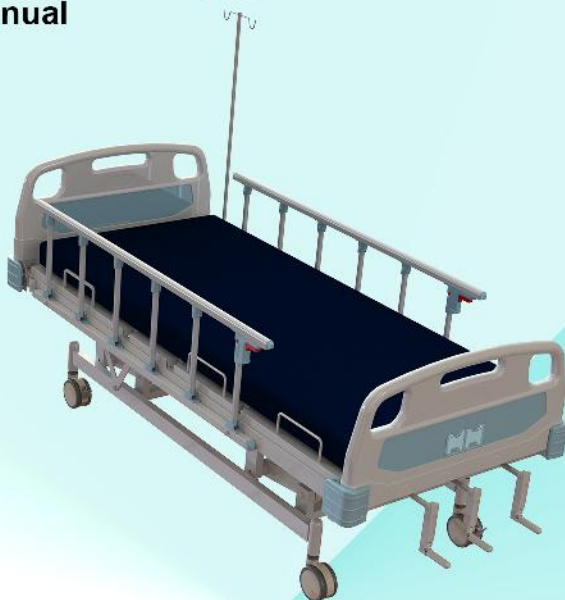

Specification :

* Part

1. Crank Mechanism

Adjustable manually by crank torque release system (crank can be rotated continuously without damage crank screw), crank handle can be folded

2. Head & foot panel

Head & foot board made of HDPE, detachable & easy to clean. Equipped with bumper (with humanization design for anti collision effect), located at each corner

3. Wheels

Four wheels 5" double wheel, equipped with brakes on two of them

4. Side guard

Made of aluminium alloy, with collapsible system and can be foled

5. Infuse stand

Made of stainless steel pipe, adjustable height with screw lock. Two hanger (hook).

6. Mattress

Dimension 1900 (L) x 860 (W) x 100 (H) mm



* Position

Back raise lifting angle : 0 - 60° (Approx)

Knee raise lifting angle : 0 - 30° (Approx)

Hi-Low : 969 - 1200 mm (Approx)

* Dimension (Approx)

Overall 2145 (L) x 980 (W) x 1200 (H) mm

Bed 1900 (L) x 860 (W) x 100 (H) mm

* Attention !



Maximum Load 200 Kg

* Direction

Turn the Crank clockwise to raise headrests.

Rotate the Crank in the opposite direction Clockwork to lower the back.

Press the red handle to increase and lower the side rail.

* Kemenkes RI

AKD 10902021732

* Production Code

HB-LW.3C

* Scan here to visit webpage



Manufactured by :

PT. Tri Cipta Teknindo
Jl. Jababeka XIV Blok J5R
Kawasan Industri Jababeka 1
Cikarang - Bekasi